





Ningbo Kaabo Technology Co., Ltd.

USER MANUAL







Company Introduction

Ningbo kaabo Technology Co., Ltd., is a company who manufacture high quality electric scooters and accessories at market-leading prices since 2013.

Our scooters are about the joy of player. Each model has been handcrafted to give scooters true freedom. Take to the open road, or cross terrain which would be impossible on a normal scooter – Kaabo scooter push the boundaries of what's possible.

Our Story

'KAABO' focus on "high-power" electric scooters. Since 2016, the electric scooter market has become increasingly competitive.

After 7 years of development, Kaabo has accumulated more than 25 patents, especially in terms of how to maintain the stability and safety of the vehicle under high speed and long battery life. We have obtained a lot of practical data to ensure the quality of the product.

✓ Please read the user manual carefully.

Do not use the product until you understand its functions. Do not rent the product to anyone who can't operate the product.

*For the first time, the user should use it with a slow speed' for safety.

Wolf Warrior X user manual

WOLF WARRIOR X

UI.	Safety guidelinesand restrictions
02.	Product structure · · · · · · · · · · · · · · · · · · ·
03.	Name of each part······
04.	Product components·················· 08
05.	How to use the product og
06.	How to use the instrument panel·····
07.	How to use the charger correctly
08.	Safety precautions for Lithium-ion battery
09.	Product specifications 20

Before Reading Manual

This manual contains important information to help you to use your product more safely. For safe use, it is marked as 'Danger', 'Caution' and 'Warning' depending on the degree of danger and the meaning is as below.



Danger: Indicates a hazardous situation that could be a result of serious injury.



Warning: Indicates a potentially hazardous situation that could be a result in light injury.



Caution: Indicates a potentially hazardous situation that could be a result in serious injury.

Before Reading Manual



✓ Please read this manual carefully before using this product

1) Safety guidelines and restrictions

* Even if the it is within the warranty period, you may be liable for any accident caused by any of the following causes.



1. Be careful of water!

This product and components are not waterproof. Don't let the water get into the product and components.

- *Never use it, if the road is wet due to the rain, snow, hailstone.
- *If you wash or spread water to electric devices, it can result in malfunction or fire.



2. Beware of folding and spinning parts!

If parts of the body, as a finger or hair, get caught in the spinning or folding parts of the product, this may lead to severe injuries. Please be careful.



3. No acrobatics

Stunts and jumps such as jumping and dropping are prohibited as they can cause a great impact on the product and can cause of malfunction and accidents.

7. Beginners and seniors are

encouraged to use at low speed



prohibited from boarding. 6.Complywiththerelatedlaws


4. Nocompanion boarding

This product is intended for

one adult only, so children,

infants, or two people are

Unlicensed, driving after drinking, loading cargo on the scooter is prohibited. (More than bike or bicycle license is required)



Please comply with the Road Traffic Act and related laws and regulations according to the place of use.



Beginners who are not accustomed to use the product, seniors and others should avoid high speed mode driving and recommend low speed driving. In addition, please use after practice how to ride safely in a wide place.



8. Do not sudden brake with front brake

If there is a risk of overturning, sudden deceleration should be done safely. Do not apply any unusual behaviors or artificial forces, such as stopping with vour feet.



Do not accelerate downhill

Slow down at downhill. When reducing the speed, to prevent brake overheat, use the brakes properly to reduce the heat on the disk with proper brake use.

WOLF WARRIOR X



10. Do not drive on steep slopes

Acceptable gradeabilityis different for each product. Excessive hill roads exceeding the specification may cause damage to the product(parts) due to temperature cut, overcurrent or low voltage cut, which may cause the product to malfunction.



11. Safety warning when lifting the product

If the product is lifted by holding only the handle, there is a possibility that the product may be damaged due to deformation of the folding part due to load or movement of the product. When lifting the product, be sure to hold the product's body (footrest) with one hand and hold the handle with the other hand so that you do not get hurt in your back or knees.




12. Be sure to wear safety equipment

For the safety of passengers, be sure to wear a full face helmet and the other protective gear (knee, elbow, hand, upper body) and do not wear shoes such as slippers, high hills that interfere with driving.

2) Precaution before driving

- 1. Night driving should be avoided in any case, be sure to wear helmets and other guards (knees, elbows, hands, upper body, etc.) and drive safely.
- 2. Select the mode that suits you and drive. In order to cope with the sudden situation, exercise to slow down to hold the brake at all times.
- 3. When turning left / right, slow down to avoid danger of overturning or slipping., And then slowly turn safely.
- 4. To go to backward, it is safe if you getting off from the product after stopping before moving.
- 5. It is prohibited to use in a slippery place, a crowded place, a steep slope, roads with a risk of accident, unevenroad,
- 6. When crossing a pedestrian crossing, get off from the product for pedestrian safety.
- 7. Do not drive in a threat any other means of transport, such as animals, pedestrians, bicycles, motorcycles, cars, etc.
- 8. If you pass the speed bumps and obstacles, be sure to slow down.
- 9. When decelerating or braking, do not stop with using foot, but stop with using brake appropriately.
- 10. Becareful that there is a risk of burns due to heat from motor and brake (especially disk rotor) after drivina.
- 11. It is prohibited to drive with all the way by holding the handle with one hand.
- 12. Do not ride or drive when the kick stand is down.



Product structure

Electric wiring diagram


As the drawing is too large and sapce is limited, please refer to the last two pages for details

Product size

Unfolded Folded 778mm 1211mm

* Errors may occur depending on the measurement method.

Name of each part WOLF WARRIOR X Handle

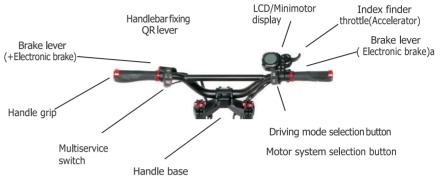

Body frame



Product components



Checking the components inside of the box

Top: Default battery charger (2A), Default tool, User manual, Labeling, Body (Lithum battery included)

Ejecting the productnumber. /



Do not hold the handlebar only when lifting the product from the box.

Please be careful that the fixing slide of the folding part may be damaged, and a safety accident such as a part of the body may be caught.

Therefore, when lifting the product, it is necessary to raise the handle bar first, and then slowly lift the body (footrest) of the product with both hands and do not damage the folding part

Check the instrument screws are tightened

Make a note of the serial num



The serial number can be used to check information such as date of purchase, warranty period, etc., and product information can be checked even if the product is lost or stolen.

(May vary depending on branch office situation.)



How to use the product

1) Production folding



1. Raise the handlepost(Steering tube)

Release the locking clamp, raise the locking slide upwards, raise the handle post, then lower the locking slided ownward.

WOLF WARRIOR X



2. Locking the folding parts

Tighten the finishing screw properly to lock the damp, so that the locking slide is firmly fixed in any direction, and check for looseness during use.

How to use a product

2) How to start



Step1. Turning on the main switch

When turning on the product, you can start driving by turning on the main power switch first (when using the built-in battery) and turning on the power of the LCD panel. When driving is finished, turn off the LCD panel and turn off the main power.

* The power of the instrument panel will turn off automatically after a few minutes of inactivity. At this time, the LED lamp is also turned off, so turn it off with the LED lamp button when you turn it on again, and turn off the main power switch after use.



Step2. Stance for driving

After tilting the kickstand, find a stable position on the footrest and then hold the handle grip comfortably. Be careful not to raise your foot on the rear fender.



Step3. Acceleration and deceleration

Acceleration can be performed by using the throttle of the instrument panel while driving, and the deceleration or stop can be performed by holding the brakes on the handle.



Before driving, be sure to check the folding part, the handle part, the part where the main fixing part of the product is fastened well. And check the position of the fixing slide, the QR lever locking status and the folding part fixing status.

Throttle malfunction caution

Regardless of whether the throttle is operated or not, the motor sensor may continue to operate, causing malfunctions such as sudden acceleration. In this case, holding the brake lever to cancel the operation. This phenomenon may be caused by corrosion of the throttling, immersion of the throttle, disconnection of the magnet, broken off levers, and breakage of the spring. Do not bounce the throttle lever strongly.

WOLF WARRIOR X

3) How to stop

Be sure to use the rear brake first for decelerating when stopping while driving. For safe stop, it is necessary to practice slow down after deceleration with rear brake. Always use the front and rear brake levers together to stop smoothly and safely after decelerating with the rear brake.



Tip

Checkfor safe braking

•Forsafe braking, check whether the brakelever and disccaliper connection (wire damage, external breakage, etc.) are damaged before and after driving, and check brake wear and looseness of brake inner core (Inner wire). In the case of hydraulic brakes, it is also necessary to check the oil leakage or deficiency and always check that the braking force is sufficient.
•Due to various factors such as road surface condition and speed, it may not be possible to stop when brake is operated as

expected. The electronic brake and ABS functions are auxiliary functions to further increase the braking force and used. The usershould understand the function and expect the operation timing when use this function.

4) Product folding







How to use the instrument panel



1. Speedometer: Shows the speed at which you are travelling.

2.Battery Indicator: Shows the level of the battery.

Charge your scooter frequently, do not let it run out of battery.

As a rough guideline, charge at or below 2 bars.

3.Gear: Shows the selected gear.

4.Gear selector: Press to set gear (1=slow, 2=medium, 3=fast).

5. Power Button: To turn the scooter on or off, press button for 2 seconds.

6.Accelerator: Pull to accelerate. The stronger you pull, the faster it accelerates.

The scooter is delivered in "Non-Zero Start" setting (Kick-And-Go is ON).

The accelerator only works if the scooter is already in motion.

7 Mode Button: Press to select various display options:

MODE COMMENT		
TIME	Time since powering on the scooter.	
TRIP	Distance travelled since powering on the scooter.	
ODO	Total distance travelled.	
VOL	Current battery voltage.	
СНА	Number of times battery has been charged (only full discharges are counted)	

WOLF WARRIOR X

PSETTINGS				
P0	Tire diameter 10. Do not change.			
P1	System voltage. Default 60V. Do not change.			
P2	Motor magnetic pole setting. Default 15. Do not change.(Mantis 10) Motor magnetic pole setting. Default 10. Do not change.(Mantis 8)			
Р3	Speed signal selection. Default is 0. Do not change.			
P4	Distance / speed unit. 0=km, 1=miles			
P5	Start setting. 1=non-zero start (Kick-and-Go), accelerator won't work if scooter is not in motion; 0 =immediate start (CAUTION while using this)			
P6	Cruise control. 0=cruise control OFF, 1=cruise control ON. Advanced riders only.			
Р7	Initial acceleration. 0=strong power, 5=least power.			
Р8	Speed limit as % of top speed, i.e. 100=no speed limit.			
Р9	Motor torque. 1=50% of max. torque, 2=75% of max. torque, 3=max. torque			
PA	Electric (regenerative) braking strength (E-ABS). 0=None, 1=Weak, 2=Medium, 3=strong.			
РВ	Display brightness (0=off, 5=highest illumination)			
PC	Scooter auto-turn off time in minutes (1-30 minutes).			
PD	ABS (anti-lock braking system) setting. 0=ABS off, 1=ABS on (as in a car, the brake engages and disengages rapidly to prevent the wheel from blocking) WARNING: Due to increased vibration and force and on scooter components when using ABS, frequently check that all bolts are properly fastened.			

Cruise Control. Cruise control allows you to maintain your driving speed automatically without continuing to hold down the accelerator. In order to enter Cruise Control, activate it first in the P-settings [P6].

While driving, keep the accelerator steady for 3-5 seconds until Cruise Control kicks in and scooter travels at a constant speed without driver holding down the accelerator. When you activate the brakes, Cruise Control will be cancelled. CAUTION: Ride in a position where you can immediately access the brake to cancel Cruise Control if necessary.



- 1. Speedometer: Shows the speed at which you are travelling.
- 2.Battery Indicator: Shows the level of your battery. Charge your scooter frequently, and do not let it run out of battery. As a rough quideline, charge at or below 2 bars.
- 3. Power Button: To turn the scooter on or off press the button for 2 seconds.
- 4.Accelerator: Pull to accelerate. The stronger you pull, the faster it accelerates. The scooter is delivered in "Non-Zero Start" setting (Kick-And-Go is ON), i.e. the accelerator only works if the scooter is already in motion.
- 5. Mode Button: Press to select various display options:

MODE	COMMENT	
TIME	Time since powering on the scooter.	
TRIP	Distance travelled since powering on the scooter.	
ODO	Total distance travelled.	
VOL	Current battery voltage.	
CH2:00	Charging mode. Time (2 hours) scooter stays ON (overrides -switch off) so you can use the display's USB port to also charge things e.g. your phone.	


P- SETTINGS				
P0	Tire diameter 10. Do not change.			
P1	System voltage. Default 530 .Do not change.			
P2	Motor magnetic pole setting. Default is 30. Do not change.			
Р3	Speed signal selection. Default is 0. Do not change.			
P4	Distance / speed unit. 0=km, 1=miles			
P5	Start setting. 1=non-zero start (Kick-and-Go), accelerator won't work if scooter is not in motion; 0 =immediate start (CAUTION while using this)			
Р6	Cruise control. 0=cruise control OFF, 1=cruise control ON.			
Р7	Initial acceleration. 0=soft, 1=strong.			
P8	Electric (regenerative) braking (E-ABS). 0=E-ABS off, 1=E-ABS on			
Р9	Speed limit as % of top speed, i.e. 100=no speed limit.			
PA	Clear total distance travelled (ODO).			
РВ	Scooter auto-turn off time in minutes.			
PC	Display brightness (1=low, 2=medium, 3=high)			

Cruise Control. Cruise control allows you to maintain your driving speed automatically without continuing to hold down the accelerator. In order to enter Cruise Control, activate it first in the P-settings [P6].

While driving, keep the accelerator steady for a few seconds until Cruise Control kicks in and scooter travels at a constant speed without driver holding down the accelerator. When you activate the brakes Cruise Control will be cancelled. CAUTION: Ride in a position where you can immediately access the

How to use a charger correctly

1) Basic charging method





- 3. Be sure to close the charging port cap when driving or storing except when charging.
- 4. When connecting the connector to the charging port, metallic sparks due to voltage difference may be splashed, but this is normal
- 2) Basic charging method * Failure of the charger and abnormal conditions can cause electric shock and fire. Learn the correct usage and prevent safety accidents in advance.
- Manufacturers and sellers are not responsible for any problems arising from any disassembly, modification, or mixing with other chargers.



- 2. Thechargerisforbiddento beused in placessubjectto high humidity, heat, flammable materials, confined spaces, or where there is no ventilation such as in a car.
- 3. The charger is not waterproof. It is thoroughly controlled to prevent moisture from entering the charger.
- Children and pets should not be allowed to approach the charger when they come into contact with them, as they may cause an electric shock.
- If the charger lamp does not light, charger fall, strong external shock, long time charge, or cable cover damage, discontinue use immediately and contact the service center.



6. Unplug the charger when you are away from the home for long periods of time.



- 7. Use only genuine charger.
- 8. Do not insert conductors into the charging port.
- 9. Do not touch the plug for about 10 seconds after unplugging the charger. There is a risk of electric shock from instantaneous discharge.
- Do not remove the terminal during charging. Charge the internal circuit of the charger and cause malfunction.
- 11. Do not operate the product during charging.
- 12. Charging terminals should be firmly contacted during charging and should not be used if terminals are corroded or damaged.
- 13. When disconnecting the charger from the product, it is safe to hold the terminal without holding the wire.
- * Short-circuit Caution: Becareful not to short-circuit the battery because short-circuiting of the battery is very dangerous.
- * Over current Note: The battery of this product is designed to automatically shut off the power supply to protect the battery when the over current is over 100A.
- * LowVoltageCaution: The battery of this product is designed to be automatically shut of fwhen the voltage drops below 48V. Do not use the product in the low voltage state.

Safety precautions for Lithium battery WOLF WARRIOR X

- 1. Care Lithium batteries should be protected from direct exposure to children and pets.
- 2. Performance ① Lithium battery is affected by external temperature. In winter, when the temperature is low, the performance of the battery is temporarily deteriorated and the mileage and power output is reduced.
 - ② Lithium battery has a characteristic that discharge performance is reduced by more than 15% when charging / discharging 300 times or more. If usage time is shortened due to long usage, it should be replaced with a genuine one through the nearest point.



- 3. Charging ① Lithium battery should be used only with genuine battery and charger supplied from the manufacturer. Any problems caused by use of battery made by the manufacturer, mixed use, or using the charger are not covered by the manufacturer.
- ② Charging the lithium battery with a non-genuine charger may cause malfunction or fire.
- A Lithium battery should be charged at $0\sim45$ C and discharged within - $10\sim60$ C. Charging or discharging at a temperature outside this range may cause malfunction, fire or explosion.
- \odot In case of moving from cold outside to warm indoor, please charge it after $1\sim2$ hours. This is to prevent condensation from occurring inside the product due to temperature difference.
- 4. Storage ① Lithium batteries should be keptaway from snow, rain and direct sunlight. Do not store or charge them in a trunk or hot room. Select a dry place and store a troom temperature ($10 \sim 20 \, ^{\circ}$).
- @ When storing for more than 3 months, charge the remaining battery level to 70 \sim 80% (do not store full charge).
- 5. Trouble symptom, safety ① Lithium battery should be discontinued immediately if it is damaged or leakage of battery, sour odor, appearance deformation, etc., and contact the place of purchase to get technical support and service.
 - ② If overheat, smoke or ignition is detected in a product with lithium battery, immediately stop charging and use, move the product outdoors as soon as possible, and then use a fire extinguisher to evolve. Do not spray water or immerse the product in order to evolve, which is more dangerous.
 - ③ Lithium battery pack has very high energy density, so if you charge the battery for a long time in case of short-circuit, leakage, bad battery, etc., there is a possibility of ignition. Therefore, you should avoid charging for a long time without a person, and charging must be done while the person is aware that the risk of unexpected fire can be avoided.
- 6. Misuse If the lithium battery is short-circuited or the polarity is changed, or if the battery is impacted, malfunction or fire may result. If you think that the battery has been impacted, you should stop charging and using it and visit the nearest point for inspection.
- 7. Water inflow It should be controlled to prevent water inflow into the lithium battery. There is a risk of fire or electric shock if the charger is connected while moisture is present.
- 8. Caution Disconnect the battery from the main unit and prohibit recharging, reinstalling, or using other applications.
- 9. Disposal Disposal When disposing of the lithium battery, the battery should be separated from the productat the point of purchase or near the points othat the charge and discharge terminals are not short-circuited. Dispose of it as industrial waste when disposing of it.



Battery disassembly prohibited

Battery disassembly, modification and repair are not covered under warranty.

Product Specification

kaaluu®	Wolf Warrior X		
Configuration	60V21Ah ★	60V28Ah ★	
Version name:	COMING SOON	COMING SOON	
Color		Black	
Battery Type	Li-lon battery pack 18650		
Battery Model	DMEGC26E	LG MJ1/samsung 35E	
Moter power		1100W*2	
Max speed	Around70km/h		
Max Range	Around 70 km (75kgs load ,25 km /h flat road ride at constant speed, full of electricity, sufficient air pressure)	Around100 km (75kgs load ,25 km /h flat road ride at constant speed, full of electricity, sufficient air pressure)	
Climbing Angles	<35 °		
Max Load		120kgs	
Charger	67.2V2A 1+3-		
Charging time (Use 2A*1)	Around 11 hrs	Around14 hrs	
Charging time (Use 4A+2A)	Around3.5hrs	Around4.6 hrs	
Shock Absorber	Front patent hydraulic shock absorber+Rear C spring shock		
Brake	Frond and rear hydraulic brake (140) +EABS		
Light	LED Pedal lamp(RGB:	Set different colors on your phone)	
Horn	Motorcycle-grade horn		
Controller	Sine Wave (Optional minimotors controller)		
Open size	1211*650*1228mm		
Floding size	1211*650*578mm		
N.W.	33.8kgs		
Tyres	10 *3.0(Street tyres/Off-road tyres)		
Display	LCD Intelligent Display (battery power, single mileage, total		
Product materials	Handle, frame, bar materia t6 aluminum forging; Cove	al 6061- t6 aluminum alloy and 6082- r PP; Shaft scm440;	

^{*}The specification can be changed by manufacturer without notice to improve the quality and safety for users.

*The distance can be affected by loaded weight, wind direct (wind speed), road condition, slope and tire condition.

MEMO

Adjustable color pedal lamp



- 1. Nearly 100 lighting modes available
 - 2. Free choice of colors
- 3. Color brightness and change speed can be adjusted at will