



DIPSTICKS 5x15 mm

Mod. 1501



APPLICATION

Ridart dipsticks are used for checking the level of liquids in the tank. They are made of black anodized aluminum or stainless steel. We produce different sizes specified in the table below.

CHEMICAL SUITABILITY

- Anodized Aluminium Standard model is for traditional fuel without additives.
- Stainless Steel model is for aggressive solvents, acids or bases.



CE Ex II 2 G

ANODIZED ALUMINIUM

CODE	A	B
094672	300	400
094673	300	500

STAINLESS STEEL


CODE	A	B
094675	150	250
094676	200	300

DIPSTICKS:

Dimension: 5x15 mm

Value A : marked height

Value B : total length dipstick

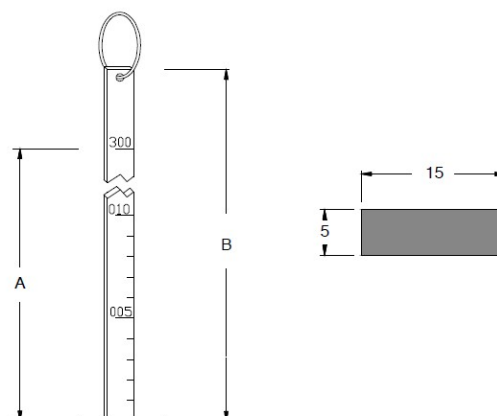

APPLICATION

- For correct use follow the Directives and product User Manual.
- Contact our technical department for custom application or maintenance by email to: quality@ridart.it.
- Product Certification, Declaration of Conformity and User Manuals are available on: www.ridart.it/support.

MAINTENANCE

- Periodically check the dipstick.
- Always replace the product after fire or deflagration.
- In case of tampering warranty expires and safety protection is not guaranteed.

RIDART s.r.l. via Adua, 17 - 21045 Gazzada Schianno (VA) ITALY P.IVA/C.F. IT 01454770122

www.ridart.it info@ridart.it +39 0332 463301

Product Certification, Declaration of Conformity, User Manual and Testing on: www.ridart.it/support

The Data and Images are not binding. We reserve the right to make changes without notice. Pressure & Flow Tolerances $\pm 20\%$.